


Special features:

- Access panels with quick release clamps for easy cleaning
- Centrifugal force for washing and rinsing with water
- Separation of impurities such as labels
- Replaceable wear parts
- External motor
- Washing agents can be added
- Conveying screw is mild steel.

- Housing is stainless steel
- Fresh water nozzles (electro-pneumatic) for cleaning screens
- The rotor shaft can be equipped with holes for the rinsing of the flakes; the top of the shaft will be fitted with a rotational seal and connected to a water inlet

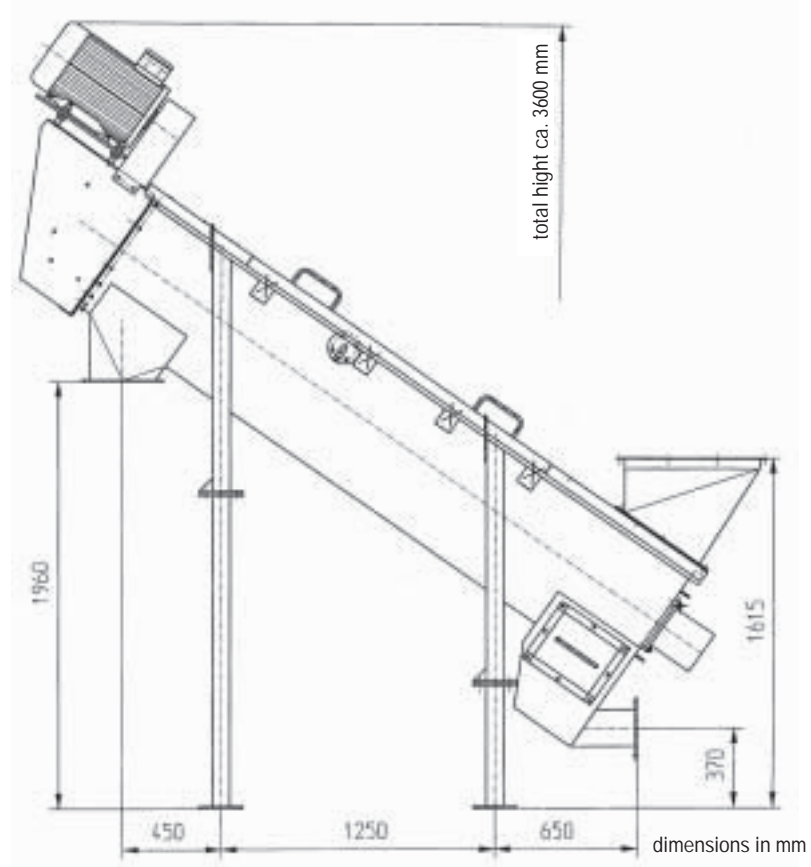

HERBOLD



Friction Washer

The friction washer is made of a cylindrical trough with an inclined fast running paddle screw to dewater and clean ground material (film flakes, granules and the like). The screw is fixed in the housing by the means of two bearings and enclosed by a stainless steel screen. The ground material and water are fed from above at the lower end of the trough. Then the material is washed while being transported to the outlet at the top of the trough. Fines and water are thrown through the fine screen to the outside while the friction of the high-speed screw cleans the material. The drain is located at the lower end of the trough. The screen is automatically cleaned by means of a water-rinsing unit.

The trough is equipped with a 360° removable screen (standard hole diameter: 2,5 mm), a rinsing device ensures for regular cleaning of the interior housing.

This unit is used to wash highly contaminated film flakes for example. They are used for discharging treated material mixed with water from a wet grinder. This also can be used in special cases where the friction washer can be installed in front of or after the washing tanks and hydrocyclone units.



Technical data:	
Model	FAS 3000
Conveying length: (mm)	3000
Screw diameter: (mm)	500
VA execution (except shaft)	Incl.
Screw (paddle) speed	1000 RPM
Screen hole size (mm)	max. 3
Drive (kW)	11 - 22
Water consumption (m³/hr)	up to 100
Throughput (t/h)	
HDPE	2.5
LDPE	1.5
PET	3.0
Weight	

Our product range

- Granulators
- Pulverizing Systems
- Shredders
- Hammer Mills
- HOG Shredders
- Guillotines
- Washing Systems
- Plastcompactors

Herbold Meckesheim GmbH
 Industriestr. 33
 D-74909 Meckesheim
 Postfach 1218
 D-74908 Meckesheim
 Tel.: + 49 (0) 6226/ 932- 0
 Fax: + 49 (0) 6226/932-495
 E-Mail: Herbold@Herbold.com
 Internet: www.Herbold.com

Our US-Subsidiary:
Resource Recycling Systems Inc.
 333 George Washington Highway,
 USA-Smithfield,
 Rhode Island, 02917
 Phone: + 1 401 232 3354
 Fax.: + 1 401 232 5425
 info@resourcerecycling.net
 www.resourcerecycling.net